

Manage and operate your garage.

A powerful app platform built for residental, commercial and industrial door and gate openers.





🥟 Google Play

🗯 App Store





MULTI-FG DRIVES FOR GARAGE SPRING BALANCED DOORS

Standard kit includes



Parameters

Model

wodei
Input voltage
Max. opening speed
Max. door height
Bottom base material
Drive mechanism
Frequency
Max. door area
Max. door weight
Built-in WiFi
Built-in safety receiver

700N 1100N

220-240V / 110-127V, 50-60Hz 200 mm/second 2300-3000 mm Metal Belt / Chain 433MHz / 868MHz 7m² 11m² 90kg 140kg Included Included

Mechanical technology

Modular design


- Screw package *1

- Manual and QRC *1

- Each module is easy to disassemble and can be quickly replaced and repaired without removing the motor.

F-LinX

35



New motor: 2071A

- Powerful and quiet
- Faster speed: 200 mm/second
- Longer service life



200 mm/s Opening Speed



Stronger Force Margin



Longer Service Life

Convenient installation

- Uniform European screw design, installers only need one screw gun, improving installation efficiency.



Battery backup


- Optional, no installation and wiring required.





Built-in WiFi technology

- Linked to the F-linX app, you can control your garage doors anywhere by phone.

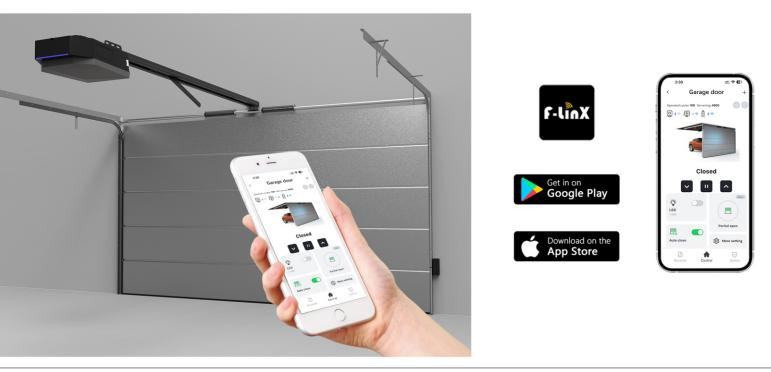

1 3S

Multi-frequency technology

Wireless communication using multi-frequency technology between MULTI-FG and wireless safety accessories.
Allows users to track information about garage doors and wireless safety system through the F-linX app Safety Center.



Optional safety devices:



OTA technology

- Fast bluetooth wireless program upgrade





Two-color status indicator

- Redefine MULTI-FG start up, door opening, door closing, warning and other status indicators.









FMK motorized s.r.o. Kotojedy 110 767 01 Kroměříž Czech Republic

info@fmk-motorized.com office@fmk-motorized.com www.fmk-motorized.com